

CONVERSION SYSTEM FOR EASY OPEN ENDS




FEATURES

- Integral single piece cast design body
- 4-point bearing design for crankshaft
- Clutch and brake as separate elements for short braking distance
- Hydraulic playfree locking device for screw rods
- Quick lift slide

TECHNICAL DATA

	EOE-P-80	EOE-P-125
PRESS TYPE:	EOE-P-80	EOE-P-125
CAPACITY:	80t	125t
STROKE LENGTH:	40 mm	40 mm
PRESS SPEED:	200-600 spm	200-600 spm
SHUT HEIGHT	355 mm	375 mm
SHUT HEIGHT ADJ.	50 mm	50 mm
QUICKLIFT	70 mm	70 mm
MAIN DRIVE:	21 kW	21 kW
SHELL DIAMETER:	up to 2-out ≤ 99mm/401	up to 4-out ≤ 99mm/401
SHELL DIAMETER:	up to 3-out ≤ 68mm/206	

Alternatively we offer systems with rebuilt Minster or Bruderer presses

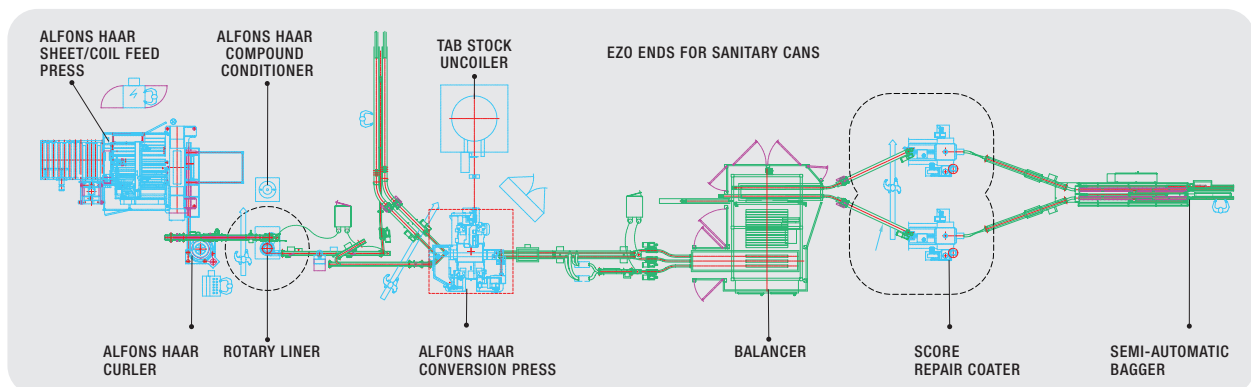

MICROGUIDE

Integrated features:

- Score heaters with closed loop regulation
- Optical leak detector
- ASI field bus for simple wiring

